


Counter Top Unit

Français →

Model No. MHX999-CTSSIL

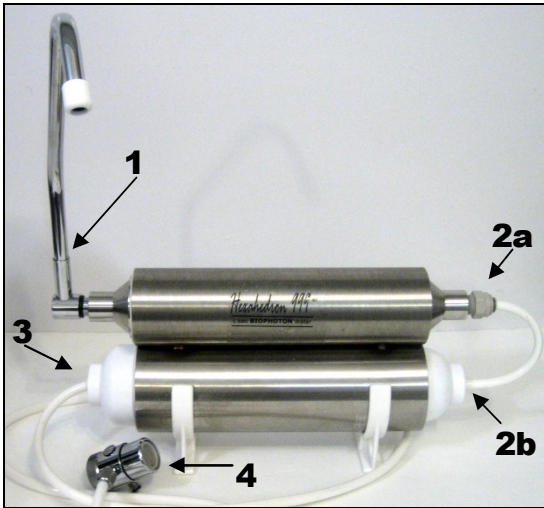

Assembly Instructions :	
1.	Insert the spout into the chrome elbow. (Note: This new Counter Top Unit now has an "instant flow faucet" - so you cannot forget to turn it off)
2 a.	Insert one end of the small tubing into the inlet of the Hexahedron 999® Unit
2 b.	Hand screw the tubing connectors (provided) into the filter cartridge - one on each end - position 3 and 2b Insert the other end of the small tubing into the outlet of the filter cartridge (2b)
3.	Insert the long tubing (with diverter valve on other end) into the inlet of the KDF/GAC filter
NOTE	After inserting the hose (2a,2b,3) TUG lightly on it to ensure that it is properly secured – it should not come out of the connection holes.
4.	Attach the diverter valve to your kitchen faucet ... first remove the small nipple (with screen) at the end of the kitchen faucet (a plumber's pliers is often required) ... then screw on the diverter valve. If the threads on the tube of your faucet are not the same size as the diverter valve threads, use the Universal Adaptor(s) supplied in the package.

Initial Start-Up Instructions :

After attaching all of the above parts :

- Turn ON the **cold** water tap at the sink,
- On the diverter valve – turn/push the switch (or pull out the knob) so that it is in an "ON" position,
- Allow the water to run for 5 minutes in order to activate and flush the filter cartridges.

The water will become black due to the presence of the activated charcoal (which is a black powder) ... it will clear up rapidly. You can check the clarity of the water by using a transparent glass. Repeat this same process whenever you replace the KDF®GAC filter cartridge.

WARNING: NEVER USE HOT WATER IN THE UNIT

When changing the filter cartridge ...

- First make sure the water faucet at the sink and the diverter valve are turned OFF.
- Press down on the inner ring (see Image 1 – also found on the bottom of your unit)
- At the same time pull the hose outward
- Repeat for the other end of the cartridge
- Insert the new replacement cartridge (flow direction is indicated on the cartridge)
- Reinsert the hose on both ends of the cartridge
- After inserting the hose tug lightly on it to ensure that it is properly secured – it should not come out of the connection holes.
- Turn on the cold water tap and allow the cartridge to flush for 5 minutes.



Image 1

The KDF/GAC filter should be replaced once a year (every 12 months) ... or when water starts to taste of chlorine.

CONGRATULATIONS - You just acquire a Hexahedron 999 Unit. This unit has been Hand Crafted in Harmony with Nature with Love and Appreciation. Many craftsmen from different trades participated in this process. In spite of all the care taken, it is possible to find scratches and handling marks on your unit. This is normal and is part of the uniqueness of your particular unit. These marks do not affect the operation or the solidity of the unit in any way.

LEGAL NOTICE :

Attention : The use of the Hexahedron 999® and its trademark(s) and/or the Biophoton Research and/or any published R&D as a means for the marketing and commercialisation of any form of third-party product **including** bottled water and/or processed food or produce and/or various beverages **is strictly prohibited** ... without the prior written agreement of the Copyright / Intellectual Property Owner

For more information contact :

The Registered Distributor and/or Manufacturer indicated on your Warranty