


# Portable Unit

Français →

Model No. MHX999-PT

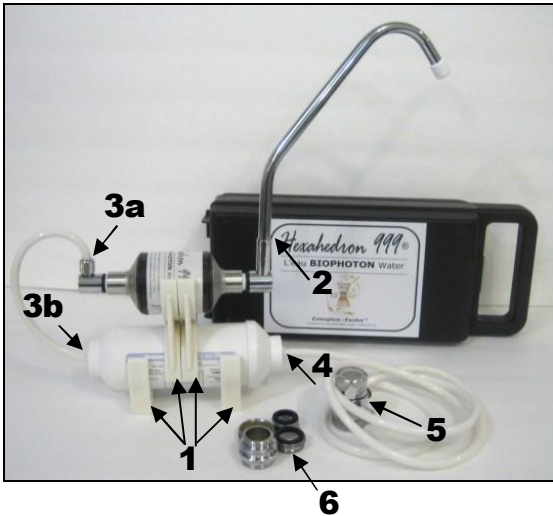

## Assembly Instructions :

1.	Install the four (4) mounting clips as shown
2.	Insert the spout into the chrome elbow. (Note: This new Portable Unit now has an "instant flow faucet" - so you cannot forget to turn it off)
3 a.	Insert one end of the small tubing into the inlet of the Hexahedron 999® Unit
3 b.	Insert the other end of the small tubing into the outlet of the KDF/GAC filter
4.	Insert the long tubing (with diverter valve on other end) into the inlet of the KDF/GAC filter
NOTE	After inserting the hose (3a, 3b, 4) TUG lightly on it to ensure that it is properly secured – it should not come out of the connection holes.
5.	Attach the diverter valve to your kitchen faucet ... first remove the small nipple (with screen) at the end of the kitchen faucet (a plumber's pliers is often required) ... then screw on the diverter valve.
6.	If the threads on the tube of your faucet are not the same size as the diverter valve threads, use the Universal Adaptor(s) supplied in the package.

## Initial Start-Up Instructions :

After attaching all of the above parts :

- Turn ON the **cold** water tap at the sink,
- On the diverter valve – turn/push the switch (or pull out the knob) so that it is in an "ON" position,
- Allow the water to run for 5 minutes in order to activate and flush the filter cartridges.

The water will become black due to the presence of the activated charcoal (which is a black powder) ... it will clear up rapidly. You can check the clarity of the water by using a transparent glass. Repeat this same process whenever you replace the KDF®GAC filter cartridge.

## WARNING: NEVER USE HOT WATER IN THE UNIT

## When changing the filter cartridge ...

- First make sure the water faucet at the sink and the diverter valve are turned OFF.
- Press down on the inner ring using the black key or your finger nail (see Image 1)
- At the same time pull the hose outward
- Repeat for the other end of the cartridge
- Insert the new replacement cartridge (flow direction is indicated on the cartridge)
- Reinsert the hose on both ends of the cartridge
- After inserting the hose tug lightly on it to ensure that it is properly secured – it should not come out of the connection holes.
- Turn on the cold water tap and allow the cartridge to flush for 5 minutes.

The KDF/GAC filter should be replaced once a year (every 12 months) or after 2,500 gallons (9,450 liters) whichever comes first ... or when water starts to taste of chlorine. For use with potable water only.

Everything fits into a small (12" x 4 3/4" x 3") carrying case which can easily be slipped into your luggage or briefcase - making the Hexahedron 999® Portable Unit easier than ever to take it with you to the cottage, office or when traveling.

## LEGAL NOTICE :

**Attention :** The use of the Hexahedron 999® and its trademark(s) and/or the Biophoton Research and/or any published R&D as a means for the marketing and commercialisation of any form of third-party product **including** bottled water and/or processed food or produce and/or various beverages **is strictly prohibited** ... without the prior written agreement of the Copyright / Intellectual Property Owner - licensing and royalty fees may apply, according to the agreement.

## For more information contact :

The Registered Distributor and/or Manufacturer indicated on your Warranty



Image 1